


# 陕西旋星电子科技有限公司

## 普通过孔滑环规格

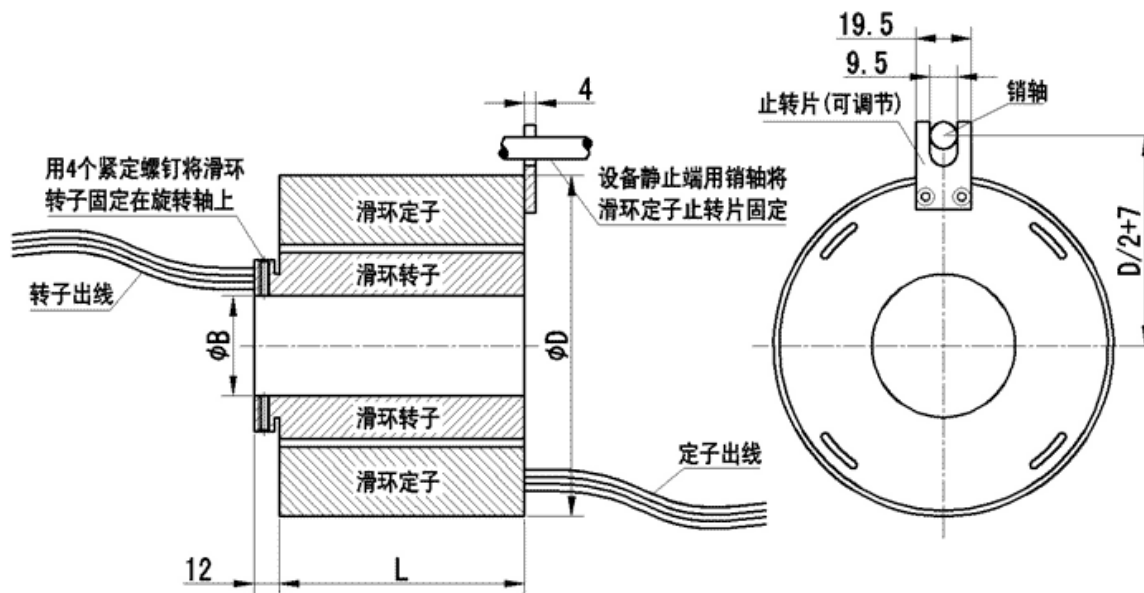

型号说明:

产品型号	过孔直径 B	外径 D	动力(P) 环数	高度 L	转速 (r/min)	电流范围 (A)	电压范围 DC/AC	温度范围 (°C)
ST-12-54	12	54	6	33.8	0~300	1A-100A	5-380	-20~80
ST-12-54	12	54	12	47.3	0~300	1A-100A	5-380	-20~80
ST-12-54	12	54	18	61.6	0~300	1A-100A	5-380	-20~80
ST-12-54	12	54	24	75.7	0~300	1A-100A	5-380	-20~80
ST-25-78	25	78	6	55	0~300	1A-100A	5-380	-20~80
ST-25-78	25	78	12	79	0~300	1A-100A	5-380	-20~80
ST-25-78	25	78	18	103	0~300	1A-100A	5-380	-20~80
ST-25-78	25	78	24	127	0~300	1A-100A	5-380	-20~80
ST-38-99	38	99	6	54.1	0~300	1A-100A	5-380	-20~80
ST-38-99	38	99	12	77.9	0~300	1A-100A	5-380	-20~80
ST-38-99	38	99	18	101.7	0~300	1A-100A	5-380	-20~80
ST-38-99	38	99	24	125.5	0~300	1A-100A	5-380	-20~80
ST-38-99	50	120	6	70	0~300	1A-100A	5-380	-20~80
ST-38-99	50	120	12	100	0~300	1A-100A	5-380	-20~80

产品型号	过孔直径 B	外径 D	动力(P) 环数	高度 L	转速 (r/min)	电流范围 (A)	电压范围 DC/AC	温度范围 (°C)
ST-38-99	50	120	18	130	0~300	1A-100A	5-380	-20~80
ST-50-120	50	120	24	160	0~300	1A-100A	5-380	-20~80
ST-50-120	50	120	30	190	0~300	1A-100A	5-380	-20~80
ST-50-120	50	120	36	220	0~300	1A-100A	5-380	-20~80
ST-50-120	50	120	6	77.5	0~300	1A-100A	5-380	-20~80
ST-50-120	50	120	12	107.5	0~300	1A-100A	5-380	-20~80
ST-50-120	50	120	18	137.5	0~300	1A-100A	5-380	-20~80
ST-50-120	50	120	24	167.5	0~300	1A-100A	5-380	-20~80
ST-50-120	50	120	30	197.5	0~300	1A-100A	5-380	-20~80
ST-50-120	50	120	36	227.5	0~300	1A-100A	5-380	-20~80
ST-50-120	50	120	42	257.5	0~300	1A-100A	5-380	-20~80
ST-50-120	50	120	48	287.5	0~300	1A-100A	5-380	-20~80
ST-70-155	70	155	6	80.8	0~300	1A-100A	5-380	-20~80
ST-70-155	70	155	12	110.8	0~300	1A-100A	5-380	-20~80

产品型号	过孔直径 B	外径 D	动力(P) 环数	高度 L	转速 (r/min)	电流范围 (A)	电压范围 DC/AC	温度范围 (℃)
ST-70-155	70	155	18	140.8	0~300	1A-100A	5-380	-20~80
ST-70-155	70	155	24	170.8	0~300	1A-100A	5-380	-20~80
ST-70-155	70	155	30	208.8	0~300	1A-100A	5-380	-20~80
ST-70-155	70	155	36	230.8	0~300	1A-100A	5-380	-20~80
ST-70-155	70	155	42	260.8	0~300	1A-100A	5-380	-20~80
ST-70-155	70	155	48	290.8	0~300	1A-100A	5-380	-20~80
ST-80-180	80	180	6	88.5	0~300	1A-100A	5-380	-20~80
ST-90-190	90	190						
ST-80-180	80	180	12	118.5	0~300	1A-100A	5-380	-20~80
ST-90-190	90	190						
ST-80-180	80	180	18	148.5	0~300	1A-100A	5-380	-20~80
ST-90-190	90	190						
ST-80-180	80	180	24	178.5	0~300	1A-100A	5-380	-20~80
ST-90-190	90	190						

产品型号	过孔直径 B	外径 D	动力(P) 环数	高度 L	转速 (r/min)	电流范围 (A)	电压范围 DC/AC	温度范围 (°C)																																																																																				
ST-80-180	80	180	30	218.5	0~300	1A-100A	5-380	-20~80																																																																																				
ST-90-190	90	190							ST-80-180	80	180	36	248.5	0~300	1A-100A	5-380	-20~80	ST-90-190	90	190	ST-80-180	80	180	42	278.5	0~300	1A-100A	5-380	-20~80	ST-90-190	90	190	ST-80-180	80	180	48	308.5	0~300	1A-100A	5-380	-20~80	ST-90-190	90	190	ST-100-205	100	205	6	93.5	0~300	1A-100A	5-380	-20~80	ST-100-205	100	205	12	125	0~300	1A-100A	5-380	-20~80	ST-100-205	100	205	18	156.5	0~300	1A-100A	5-380	-20~80	ST-100-205	100	205	24	188	0~300	1A-100A	5-380	-20~80	ST-100-205	100	205	30	219.5	0~300	1A-100A	5-380	-20~80	ST-100-205	100	205
ST-80-180	80	180	36	248.5	0~300	1A-100A	5-380	-20~80																																																																																				
ST-90-190	90	190							ST-80-180	80	180	42	278.5	0~300	1A-100A	5-380	-20~80	ST-90-190	90	190	ST-80-180	80	180	48	308.5	0~300	1A-100A	5-380	-20~80	ST-90-190	90	190	ST-100-205	100	205	6	93.5	0~300	1A-100A	5-380	-20~80	ST-100-205	100	205	12	125	0~300	1A-100A	5-380	-20~80	ST-100-205	100	205	18	156.5	0~300	1A-100A	5-380	-20~80	ST-100-205	100	205	24	188	0~300	1A-100A	5-380	-20~80	ST-100-205	100	205	30	219.5	0~300	1A-100A	5-380	-20~80	ST-100-205	100	205	36	251	0~300	1A-100A	5-380	-20~80						
ST-80-180	80	180	42	278.5	0~300	1A-100A	5-380	-20~80																																																																																				
ST-90-190	90	190							ST-80-180	80	180	48	308.5	0~300	1A-100A	5-380	-20~80	ST-90-190	90	190	ST-100-205	100	205	6	93.5	0~300	1A-100A	5-380	-20~80	ST-100-205	100	205	12	125	0~300	1A-100A	5-380	-20~80	ST-100-205	100	205	18	156.5	0~300	1A-100A	5-380	-20~80	ST-100-205	100	205	24	188	0~300	1A-100A	5-380	-20~80	ST-100-205	100	205	30	219.5	0~300	1A-100A	5-380	-20~80	ST-100-205	100	205	36	251	0~300	1A-100A	5-380	-20~80																		
ST-80-180	80	180	48	308.5	0~300	1A-100A	5-380	-20~80																																																																																				
ST-90-190	90	190							ST-100-205	100	205	6	93.5	0~300	1A-100A	5-380	-20~80	ST-100-205	100	205	12	125	0~300	1A-100A	5-380	-20~80	ST-100-205	100	205	18	156.5	0~300	1A-100A	5-380	-20~80	ST-100-205	100	205	24	188	0~300	1A-100A	5-380	-20~80	ST-100-205	100	205	30	219.5	0~300	1A-100A	5-380	-20~80	ST-100-205	100	205	36	251	0~300	1A-100A	5-380	-20~80																														
ST-100-205	100	205	6	93.5	0~300	1A-100A	5-380	-20~80																																																																																				
ST-100-205	100	205	12	125	0~300	1A-100A	5-380	-20~80																																																																																				
ST-100-205	100	205	18	156.5	0~300	1A-100A	5-380	-20~80																																																																																				
ST-100-205	100	205	24	188	0~300	1A-100A	5-380	-20~80																																																																																				
ST-100-205	100	205	30	219.5	0~300	1A-100A	5-380	-20~80																																																																																				
ST-100-205	100	205	36	251	0~300	1A-100A	5-380	-20~80																																																																																				

产品型号	过孔直径 B	外径 D	动力(P) 环数	高度 L	转速 (r/min)	电流范围 (A)	电压范围 DC/AC	温度范围 (°C)
ST-100-205	100	205	42	282.5	0~300	1A-100A	5-380	-20~80
ST-100-205	100	205	48	314	0~300	1A-100A	5-380	-20~80

**备注：环数、内径、外径、安装方式等可定制！**